

## Vivitar 700

---

Fabricant (si # de la marque) :

Pays de fabrication :

Début de fabrication : 1979

Fin de fabrication : 0

Rareté : Peu courant

Page du McKeown : -

Type d'appareil : Miniature

### Film

---

Type de film : 110

Nombre maxi de vues : 12

Format : 13 x 17 mm

Format :

Format :

Format :

Avancement :

Position :

Rembobinage : Non

Position : -

### Exposition

---

Cellule :

Position :

Sensibilité : 400 asa

### Obturbateur

---

Marque de l'obturateur :

Modèle de l'obturateur :

Type d'obturateur :

Vitesses : 1/250

### Objectif

---

Type d'objectif : Standard

Montage de l'objectif : Fixe

Marque de l'objectif :

Modèle de l'objectif :

Monture d'objectif :

Mode de map : Fixfocus

Focale : 24 mm

Ouverture maxi : 7

### Divers

---

Type de pile : AAA

Forme du soufflet :

Couleur du soufflet :

Décentrement vertical :

Décentrement horizontal :

Type de viseur : Interne fixe

Second viseur :

Le 700 est l'évolution du Vivitar 600 de 1977. L'objectif est un peu plus lumineux. La vitesse de l'obturateur reste identique.

[www.collection-appareils.fr](http://www.collection-appareils.fr)

[www.collection-appareils.fr](http://www.collection-appareils.fr)





Black vinyl custom-fit case included


## Pentax 110 Camera



New at Sears... one of the smallest, most versatile 110 SLR's

**(1) Pentax Auto-110 SLR**  
**LENS, SHUTTER, FOCUS:** See Chart bottom, right. Electronic behind-the-lens shutter. Comes with standard lens; wide-angle, telephoto sold at right.  
**EXP. CONTROL:** Programmed automatic exposure system. Daylight or flash. Accepts ASA 400 film.  
**CONSTRUCTION:** Black plastic and metal. 2.2x3.9x1.8 in. Tripod and cable release sockets, synchronizing terminal for auto flash. Battery holder tray, winder capability. Interchangeable bayonet mount lens. Back-cover window for exposure count. Actual wt. 6.1 oz. Imported.  
**ACCESSORIES:** Case, wrist strap, battery.  
**ORDERING INFO:** Warranted by Pentax. Write for free copy, see page 33.  
**C3 HA 78101C**—Shipping weight 1 lb. \$179.50

**(2) Pentax AF 130P Auto Flash Unit.** Direct contact. Automatically synchronizes with programmed shutter, aperture. Range, 2.6 to 15 feet. Recycles in 8 seconds. Use 2 AA batteries (not included), sold on page 32.

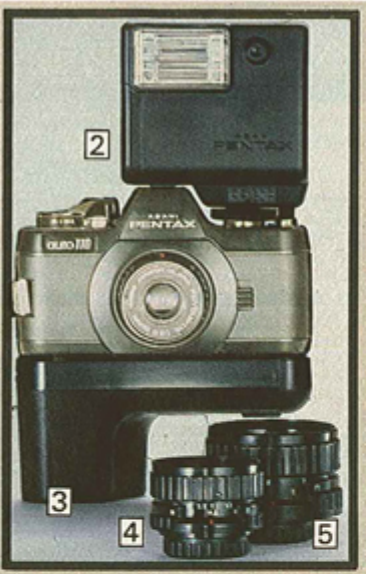


**ORDERING INFORMATION:** Warranted by Pentax. Write for free copy, see page 33.  
**C3 HA 78103**—Shipping weight 8 oz. .... \$34.50  
**(3) Pentax Auto-110 Power Winder.** Single-frame operation at all shutter speeds. Tripod socket, built-in grip, power switch. Use 2 AA batteries (not included), sold on page 32. Camera not included.  
**ORDERING INFORMATION:** Warranted by Pentax. Write for free copy, see page 33.  
**C3 HA 78102C**—Shipping weight 1 lb. . . \$49.50

**(4 and 5) Pentax Auto-110 Lenses**  
**ORDERING INFO:** Warranted by Pentax. Write for free copy, p. 33. See Chart below.  
**(4) C3HA78104C—Wide Angle.** Wt. 1 lb. \$54.50  
**(5) C3HA78105C—Telephoto.** Wt. 1 lb. . . 54.50

**Pentax Auto-110 Lens Specifications (4 and 5)**

Lens	Focal length	Maximum aperture	Minimum focus	Angle of view	Filter size	Actual length
(4)	18mm	f2.8	9.8 in.	61.5°	30.5mm	.8 in.
(5)	50mm	f2.8	35.4 in.	24°	37.5mm	1.1 in.


## Canon 110 ED Camera

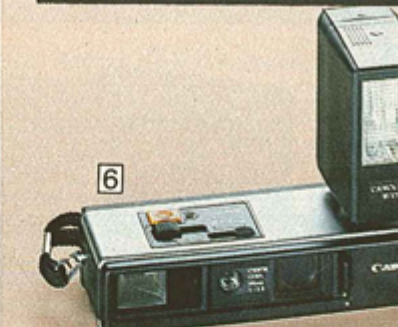

With f2.0 lens and automatic shutter plus film-date imprint

**(6) Canon Model 110 ED 20**  
**LENS, SHUTTER AND FOCUS:** See Lens and Specification Chart below. Double-image rangefinder focusing. Accepts close-up lens attachment.  
**EXPOSURE CONTROL:** CdS metering; You set shutter speed or shutter speed is set automatically. Lights indicate over exposure and camera has 400 film.  
**FLASH:** Auto, detachable. Recycles in 14 s. Uses 2 AA batteries, sold on p. 32.  
**CONSTR:** Black plastic, metal. 5.6x2.2x1.1 in. Wrist strap, battery check, electronic minifinder, extender. Date embossing mechanism imprints month, day onto film. 6-v. battery incl. Imported.  
**ORDERING INFORMATION:** Warranted by Canon. Write for free copy, see page 33.  
**C3 HA 78405C**—Shipping wt. 3 lbs. .... \$

## Vivitar Point 'n Shoot 110 Cameras

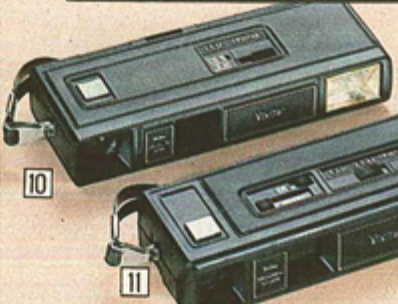

**(10) Vivitar Model 700**  
**LENS, SHUTTER AND FOCUS:** See Specification Chart below. Fixed focus.  
**EXPOSURE CONTROL:** Fixed for daylight or flash. Accepts ASA 400 film.  
**FLASH:** Automatic electronic. Recycles in 9 s. Range 6 to 12 ft. (6 to 22 ft. ASA 400).  
**CONSTRUCTION:** Black plastic and metal. 6.8x2.5x1.2 in. Imported.  
**ACCESSORIES:** Black vinyl wrist strap, 12-600 110 Kodak II color print film, 2 AA batteries.  
**ORDERING INFORMATION:** Warranted by Vivitar. Write for free copy, see page 33.  
**C3 HA 78305**—Shipping weight 1 lb. ....

**(11) Vivitar Tele Model 703**  
**LENS, SHUTTER, FOCUS:** See Chart below. or telephoto lens. Fixed focus.  
**EXPOSURE CONTROL:** Fixed for daylight or flash. Accepts ASA 400 film.  
**FLASH:** Automatic electronic. Recycles in 5 to 10 s. Range 5 to 10 ft. (5 to 18 ft. ASA 400).  
**CONSTRUCTION:** Black plastic and metal. 6.6x2.4x1.2 in. Lens selection lever.  
**ACCESSORIES:** Black vinyl wrist strap, 12-600 110 Kodak II color print film, 2 AA batteries.  
**ORDERING INFORMATION:** Warranted by Vivitar. Write for free copy, see page 33.  
**C3 HA 78306C**—Shipping weight 1 lb. ....

## Minolta 110 Cameras



With SLR viewer, zoom lens, case, auto-flash

**(7) Minolta 110 Zoom SLR**  
**LENS, SHUTTER, FOCUS:** See Chart below, right. Macro setting for as close as 11.5 in. View, shoot thru same lens. Low light, B. X, shutter speeds, battery indicator in viewfinder. Microprism focus.  
**EXPOSURE CONTROL:** You set aperture; shutter speed sets automatically. ± 2 E.V. override manual shutter adjustment. Accepts ASA 400 film.  
**FLASH:** Auto Electroflash 25 detachable; clip-on to hot shoe. Use 4 AA batteries, p. 32. Recycles in 7 sec.  
**CONSTR:** Black plastic, metal. 5.3x4.3x2.1 in. Tripod socket, cord lug, hot shoe, lens hood. Case, strap, imported.  
**ORDER INFO:** Warranted by Minolta. Write for free copy, see page 33.  
**Shipping weight 2 lbs.**  
**C3 HA 78202C** \$209.50



With built-in auto flash

**(8) Minolta Model 430E**  
**LENS, SHUTTER AND FOCUS:** See Chart below at right. Three-position zone focus. Low-light/battery check indicator, flash-ready signal is visible in viewfinder. Mechanical shutter.  
**EXPOSURE CONTROL:** Fixed for daylight or flash. CdS light meter. Accepts 400 ASA film.  
**FLASH:** Built-in, automatic. Recycles in 10 seconds. Use one AA battery sold on p. 32.  
**CONSTR:** Black plastic, metal. 6.3x2.2x1.1 in. Wrist strap lug. Lens cover.  
**ORDERING INFO:** Warranted by Minolta. Write for free copy, see page 33.  
**Shipping weight 2 lbs.**  
**C3 HA 78205C** \$54.50

With normal or telephoto lens, built-in flash

**(9) Minolta Model 460T**  
**LENS, SHUTTER, FOCUS:** See Chart below, right. Focus from 3.3 ft. by continuous slide control. Parallax correction marks. Low-light/battery check indicator, flash-ready signal visible in viewfinder.  
**EXP. CONTROL:** Slide control for varying light conditions, flash. Accepts ASA 400 film.  
**FLASH:** Built-in, automatic. Recycles in 10 seconds. Use one AA battery sold on page 32.  
**CONSTR:** Black plastic, metal. 6.6x1.2x2.4 in. Imported.  
**ORDER INFO:** Warranted by Minolta. Write for copy, p. 33.  
**Shipping weight 2 lbs.**  
**C3 HA 78203C** \$76.50

**Lens and Shutter Specification Chart (1, 6 thru 11)**

Item	Lens			Shutter	
	Focal Length	Maximum Aperture	Minimum Focus	Type	Se
(1)	24mm	f2.8	1.2 ft.	Auto	1 to 2
(6)	26mm	f2.0	2 ft.	Auto	2 to 3
(7)	25-50mm	f4.5	11.5 in.	Auto	1 to 2
(8)	26mm	f5.6	5 ft.	Fixed	1 to 2
(9)	26 or 43mm	f3.5 or 4.7	3.3 ft.	Fixed	1 to 2
(10)	26mm	f7.0	5 ft.	Fixed	1 to 2
(11)	24 or 36mm	f7.0	5 ft.	Fixed	1 to 2