

Vivitar Pocket 703

Fabricant (si # de la marque) :		Pays de fabrication :	
Début de fabrication :	1979	Fin de fabrication :	0
Rareté :	Peu courant	Page du McKeown :	-
Type d'appareil :	Miniature		

Film

Type de film :	110	Nombre maxi de vues :	20
Format :	13 x 17 mm	Format :	
Format :		Format :	
Avancement :		Position :	
Rembobinage :	Non	Position :	-

Exposition

Cellule :		Position :	
Sensibilité :	400 asa		

Obturbateur

Marque de l'obturateur :		Modèle de l'obturateur :	
Type d'obturateur :		Vitesses :	1/125

Objectif

Type d'objectif :	Autre	Montage de l'objectif :	A compléments optiques
Marque de l'objectif :		Modèle de l'objectif :	Anastigmat
Monture d'objectif :		Mode de map :	Fixfocus
Focale :	24 / 36 mm	Ouverture maxi :	7

Divers

Type de pile :		Couleur du soufflet :	
Forme du soufflet :		Décentrement horizontal :	
Décentrement vertical :		Second viseur :	Interne fixe
Type de viseur :			

Vivitar présenta lors de la Photokina de 1978, des Pocket de forme très habituelle. Leurs caractéristiques techniques sont également ordinaires.

Le 703 est l'évolution du 603. Il est bi-focale. L'objectif normal est un 24 mm à trois lentilles en verre optique. Un groupe de trois lentilles supplémentaires peut venir s'ajouter, transformant ainsi l'objectif en télé-objectif de 36 mm.

www.collection-appareils.fr



Black vinyl custom-fit case included

Pentax 110 Camera



New at Sears... one of the smallest, most versatile 110 SLR's

(1) Pentax Auto-110 SLR
LENS, SHUTTER, FOCUS: See Chart bottom, right. Electronic behind-the-lens shutter. Comes with standard lens; wide-angle, telephoto sold at right.
EXP. CONTROL: Programmed automatic exposure system. Daylight or flash. Accepts ASA 400 film.
CONSTRUCTION: Black plastic and metal. 2.2x3.9x1.8 in. Tripod and cable release sockets, synchronizing terminal for auto flash. Battery holder tray, winder capability. Interchangeable bayonet mount lens. Back-cover window for exposure count. Actual wt. 6.1 oz. Imported.
ACCESSORIES: Case, wrist strap, battery.
ORDERING INFO: Warranted by Pentax. Write for free copy, see page 33.
C3 HA 78101C—Shipping weight 1 lb. \$179.50

(2) Pentax AF 130P Auto Flash Unit. Direct contact. Automatically synchronizes with programmed shutter, aperture. Range, 2.6 to 15 feet. Recycles in 8 seconds. Use 2 AA batteries (not included), sold on page 32.




ORDERING INFORMATION: Warranted by Pentax. Write for free copy, see page 33.
C3 HA 78103—Shipping weight 8 oz. \$34.50
(3) Pentax Auto-110 Power Winder. Single-frame operation at all shutter speeds. Tripod socket, built-in grip, power switch. Use 2 AA batteries (not included), sold on page 32. Camera not included.
ORDERING INFORMATION: Warranted by Pentax. Write for free copy, see page 33.
C3 HA 78102C—Shipping weight 1 lb. . . \$49.50

(4 and 5) Pentax Auto-110 Lenses
ORDERING INFO: Warranted by Pentax. Write for free copy, p. 33. See Chart below.
(4) C3HA78104C—Wide Angle. Wt. 1 lb. \$54.50
(5) C3HA78105C—Telephoto. Wt. 1 lb. . . \$4.50

Pentax Auto-110 Lens Specifications (4 and 5)

Lens	Focal length	Maximum aperture	Minimum focus	Angle of view	Filter size	Actual length
(4)	18mm	f2.8	9.8 in.	61.5°	30.5mm	.8 in.
(5)	50mm	f2.8	35.4 in.	24°	37.5mm	1.1 in.


Canon 110 ED Camera

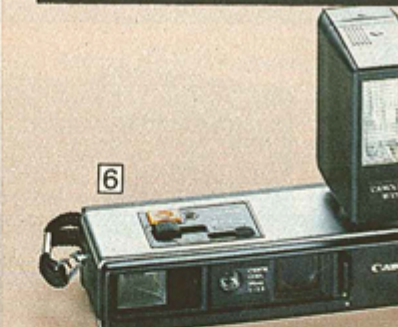

With f2.0 lens and automatic shutter plus film-date imprint

(6) Canon Model 110 ED 20
LENS, SHUTTER AND FOCUS: See Lens and Specification Chart below. Double-image rangefinder focusing. Accepts close-up lens attachment.
EXPOSURE CONTROL: CdS metering; You set shutter speed, . . . shutter speed is set automatically. Lights indicate over exposure and camera has 400 film.
FLASH: Auto, detachable. Recycles in 14 s. Uses 2 AA batteries, sold on p. 32.
CONSTR: Black plastic, metal. 5.6x2.2x1.1 in. Wrist strap, battery check, electronic minifinder, extender. Date embossing mechanism imprints month, day onto film. 6-v. battery incl. Imported.
ORDERING INFORMATION: Warranted by Canon. Write for free copy, see page 33.
C3 HA 78405C—Shipping wt. 3 lbs. \$

Vivitar Point 'n Shoot 110 Cameras

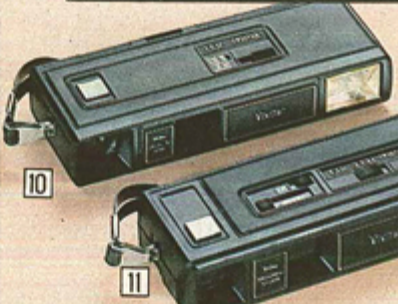

(10) Vivitar Model 700
LENS, SHUTTER AND FOCUS: See Specification Chart below. Fixed focus.
EXPOSURE CONTROL: Fixed for daylight or flash. Accepts ASA 400 film.
FLASH: Automatic electronic. Recycles in 9 s. Range 6 to 12 ft. (6 to 22 ft. ASA 400).
CONSTRUCTION: Black plastic and metal. 6.8x2.5x1.2 in. Imported.
ACCESSORIES: Black vinyl wrist strap, 12-600 110 Kodak II color print film, 2 AA batteries.
ORDERING INFORMATION: Warranted by Vivitar. Write for free copy, see page 33.
C3 HA 78305—Shipping weight 1 lb.

(11) Vivitar Tele Model 703
LENS, SHUTTER, FOCUS: See Chart below. or telephoto lens. Fixed focus.
EXPOSURE CONTROL: Fixed for daylight or flash. Accepts ASA 400 film.
FLASH: Automatic electronic. Recycles in 5 to 10 s. Range 5 to 10 ft. (5 to 18 ft. ASA 400).
CONSTRUCTION: Black plastic and metal. 6.6x2.4x1.2 in. Lens selection lever.
ACCESSORIES: Black vinyl wrist strap, 12-600 110 Kodak II color print film, 2 AA batteries.
ORDERING INFORMATION: Warranted by Vivitar. Write for free copy, see page 33.
C3 HA 78306C—Shipping weight 1 lb.

Minolta 110 Cameras



With SLR viewer, zoom lens, case, auto-flash

(7) Minolta 110 Zoom SLR
LENS, SHUTTER, FOCUS: See Chart below, right. Macro setting for as close as 11.5 in. View, shoot thru same lens. Low light, B. X, shutter speeds, battery indicator in viewfinder. Microprism focus.
EXPOSURE CONTROL: You set aperture; shutter speed sets automatically. ± 2 E.V. override manual shutter adjustment. Accepts ASA 400 film.
FLASH: Auto Electroflash 25 detachable; clip-on to hot shoe. Use 4 AA batteries, p. 32. Recycles in 7 sec.
CONSTR: Black plastic, metal. 5.3x4.3x2.1 in. Tripod socket, cord lug, hot shoe, lens hood. Case, strap, imported.
ORDER INFO: Warranted by Minolta. Write for free copy, see page 33.
Shipping weight 2 lbs.
C3 HA 78202C \$209.50



With built-in auto flash

(8) Minolta Model 430E
LENS, SHUTTER AND FOCUS: See Chart below at right. Three-position zone focus. Low-light/battery check indicator, flash-ready signal is visible in viewfinder. Mechanical shutter.
EXPOSURE CONTROL: Fixed for daylight or flash. CdS light meter. Accepts 400 ASA film.
FLASH: Built-in, automatic. Recycles in 10 seconds. Use one AA battery sold on p. 32.
CONSTR: Black plastic, metal. 6.3x2.2x1.1 in. Wrist strap lug. Lens cover.
ORDERING INFO: Warranted by Minolta. Write for free copy, see page 33.
Shipping weight 2 lbs.
C3 HA 78205C \$54.50

With normal or telephoto lens, built-in flash

(9) Minolta Model 460T
LENS, SHUTTER, FOCUS: See Chart below, right. Focus from 3.3 ft. by continuous slide control. Parallax correction marks. Low-light/battery check indicator, flash-ready signal visible in viewfinder.
EXP. CONTROL: Slide control for varying light conditions, flash. Accepts ASA 400 film.
FLASH: Built-in, automatic. Recycles in 10 seconds. Use one AA battery sold on page 32.
CONSTR: Black plastic, metal. 6.6x1.2x2.4 in. Imported.
ORDER INFO: Warranted by Minolta. Write for copy, p. 33.
Shipping weight 2 lbs.
C3 HA 78203C \$76.50

Lens and Shutter Specification Chart (1, 6 thru 11)

Item	Lens			Shutter	
	Focal Length	Maximum Aperture	Minimum Focus	Type	Se
(1)	24mm	f2.8	1.2 ft.	Auto	1 to 2
(6)	26mm	f2.0	2 ft.	Auto	2 to 3
(7)	25-50mm	f4.5	11.5 in.	Auto	1 to 2
(8)	26mm	f5.6	5 ft.	Fixed	1 to 2
(9)	26 or 43mm	f3.5 or 4.7	3.3 ft.	Fixed	1 to 2
(10)	26mm	f7.0	5 ft.	Fixed	1 to 2
(11)	24 or 36mm	f7.0	5 ft.	Fixed	1 to 2